



Gearboxes

Version with locking clamp and input mounting flange:

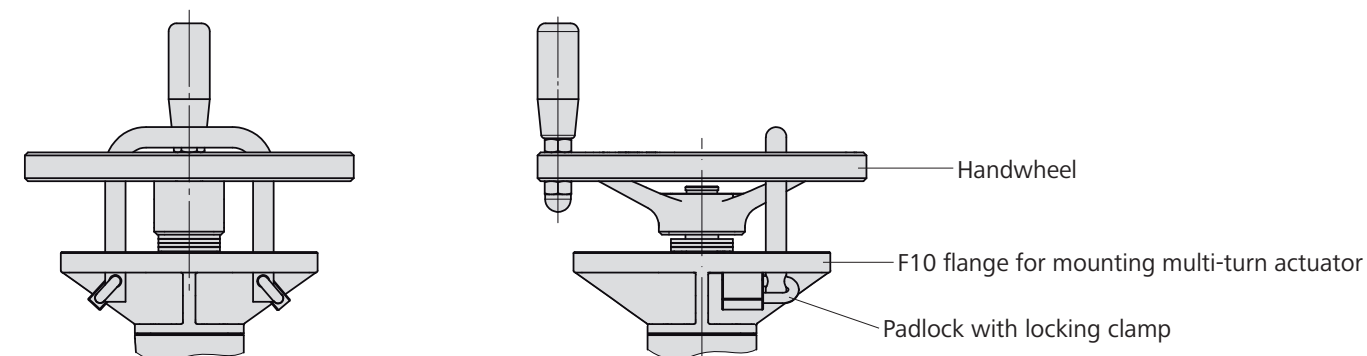

Gearbox	Reduction ratio	Handwheel Ø				
GS 50.3	51:1	160	200	250	–	–
GS 63.3	51:1	–	–	250	315	–
	82:1	–	200	250	–	–
GS 80.3	53:1/82:1	–	–	–	315	400
GS 100.3	126:1/160:1	–	–	–	315	–
	208:1	–	–	250	315	–
GS 125.3	208:1	–	–	–	315	–
GS 160.3	442:1	–	–	–	315	–
	880:1	–	200	250	315	–
GS 200.3	864:1	–	–	–	315	–
	1752:1	–	–	250	315	–
GS 250.3	1718:1	–	–	–	315	–

Version with locking clamp and locking disc:

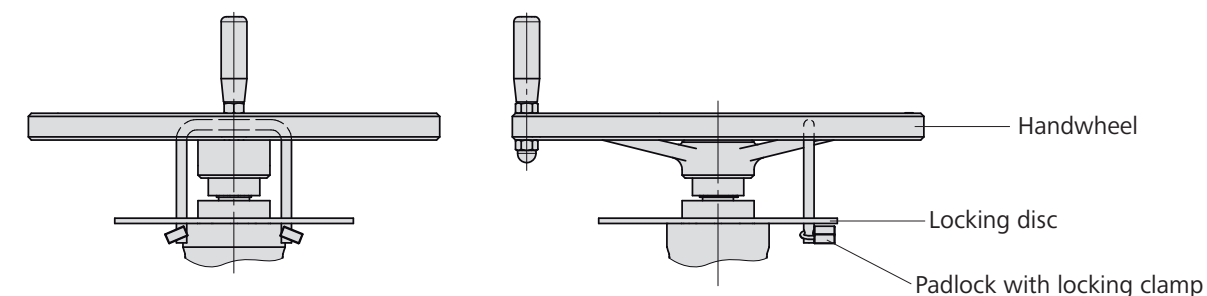

Gearbox	Reduction ratio	Handwheel Ø			
GS 100.3	52:1	400	500	630	800
	107:1	400	500	–	–
	126:1/160:1/208:1	400	–	–	–
GS 125.3	52:1	–	500	630	800
	126:1/160:1	400	500	630	800
GS 160.3	208:1	400	–	–	–
	54:1	–	–	630	800
	218:1	400	500	630	800
GS 200.3	442:1	400	–	–	–
	67:1	–	–	–	800
	214:1	–	500	630	800
	434:1	400	500	630	800
GS 250.3	864:1/1752:1	400	500	–	–
	210:1	–	–	–	800
	411:1	–	500	630	800
	848:1	400	500	630	800
	1718:1	400	500	–	–