



**Dimensions Part-turn actuators with ACExC integral actuator controls (also for Fieldbus & HART)**

With AUMA 3-phase AC motor and Ex plug/socket connector with terminal block (KT/KM)

**Standard:**  
KT-Ex e with push-in connection

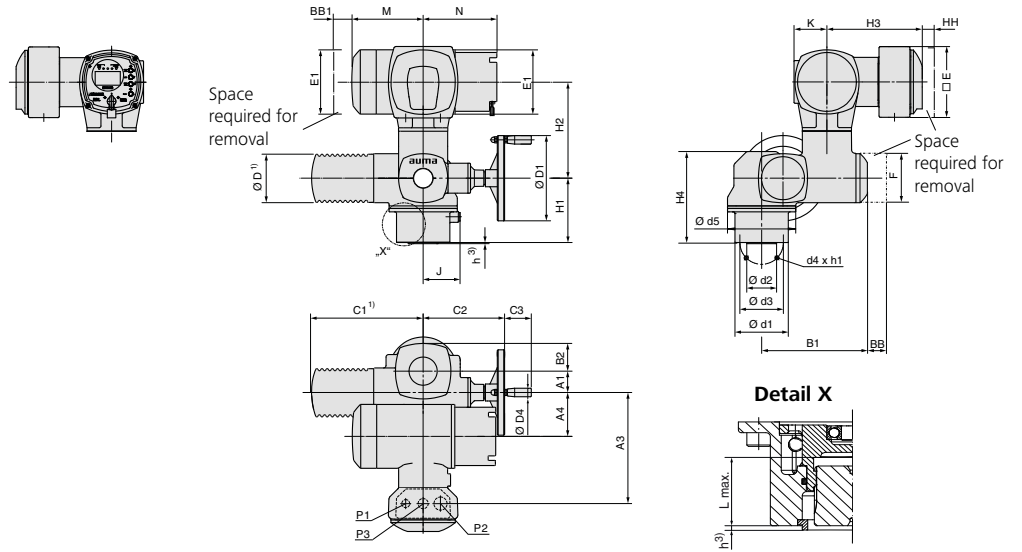

**Option:**  
KT-Ex d with push-in connection  
KM-Ex e with terminals  
KM-Ex d with terminals



**Output drives according to EN ISO 5211**  
For dimensions see overleaf


- 1) Exact dimension depending on motor used
- 2) Standard, other threads on request
- 3) Allowance for spigot is not available as standard. The spigot ring is a separate component, available as option.
- 4) Combined flange F05/F07 without spigot (standard). As an alternative an individual flange F07 can be ordered with/without spigot

Dimensions	SQEx 05.2/ACExC 01.2		SQEx 07.2/ACExC 01.2		SQEx 10.2/ACExC 01.2		SQEx 12.2/ACExC 01.2		SQEx 14.2/ACExC 01.2			
	EN ISO 5211	F05 <sup>4)</sup>	F07 <sup>4)</sup>	F05 <sup>4)</sup>	F07 <sup>4)</sup>	F10	F10	F12	F12	F14	F14	F16
A1			40				50		50			50
A3			261				261		261			261
A4			103				103		103			103
B1			245				255		255			255
B2			50				65		65			65
C1 <sup>1)</sup>			268				268		268			268
C2			186				191		191			191
C3			63				63		63			63
Ø D <sup>1)</sup>			104				104		104			104
Ø D1			160				200		200			200
Ø D4			20				20		20			20
□ E			166				166		166			166
E1			154				154		154			154
F			115				115		115			115
H1		134		134	160	151	183	175	215	210		260
H2			235				235		235			235
H3			223				223		223			223
H4		193		193	218	214	246	238	278	273		323
H5			282				282		282			282
J			69				86		109			128
K			78				78		78			78
L max.		40		40	66	50	82	61	101	75		125
M			199				199		199			199
N			171				171		171			171
□ P			170				170		170			170
P1 <sup>2)</sup>			M20 x 1.5				M20 x 1.5		M20 x 1.5			M20 x 1.5
P2 <sup>2)</sup>			M32 x 1.5				M32 x 1.5		M32 x 1.5			M32 x 1.5
P3 <sup>2)</sup>			M25 x 1.5				M25 x 1.5		M25 x 1.5			M25 x 1.5
BB min.			180				180		180			180
BB1 min.			75				75		75			75
HH min.			50				50		50			50
Ø d1		90		90	125	125	150	150	175	175		210
Ø d2		–		–	70	70	85	85	100	100		130
Ø d3		50	70	50	70	102	102	125	140	140		165
d4		4 x M6	4 x M8	4 x M6	4 x M8	4 x M10	4 x M12	4 x M12	4 x M16	4 x M16		4 x M20
Ø d5			125				160		210			225
h <sup>3)</sup>		–		–	2.5		2.5		2.5	3.5	3.5	4.5
h1		12	15	12	15	16	18	19	22	25	29	32

We reserve the right to alter data according to improvements made. Previous documents become invalid with the issue of this document.


**Dimensions Couplings according to EN ISO 5211**

Bore according to EN ISO 5211 with keyway according to DIN 6885-1

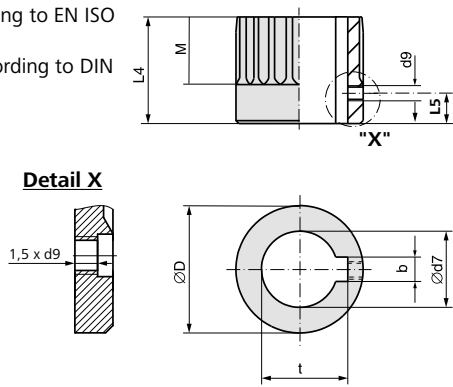


SQ../SQR..	05.2		07.2		10.2		12.2		14.2	
EN ISO 5211	F05	F07	F07	F10	F10	F12	F12	F14	F14	F16
Ø D	41.75	41.75	41.75	51.75	51.75	51.75	67.6	67.6	81.6	81.6
b JS9 <sup>1)</sup>	6	6	6	8	8	8	10	10	14	14
Ø d7 H8 <sup>2)</sup>	18	22	22	28	28	28	36	36	48	48
Ø d7 max.	25.4	25.4	25.4	38	38	38	50	50	60	60
d9 <sup>3)</sup>	M5	M5	M5	M6	M6	M6	M6	M6	M6	M6
L4	35	35	60	45	75	75	55	95	65	115
L5 <sup>3)</sup>	8	8	8	10	10	10	10	10	10	10
M	20	20	20	30	30	30	40	40	47	40
t <sup>1)</sup>	20.8	24.8	24.8	31.3	31.3	31.3	39.3	39.3	51.8	51.8

Square bore according to EN ISO 5211

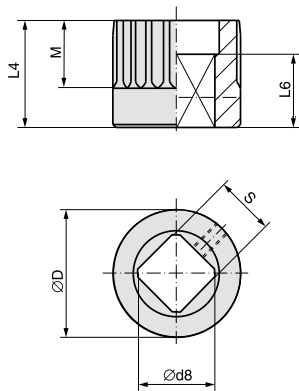

SQ../SQR..	05.2		07.2		10.2		12.2		14.2	
EN ISO 5211	F05	F07	F07	F10	F10	F12	F12	F14	F14	F16
Ø D	41.75	41.75	41.75	51.75	51.75	51.75	67.6	67.6	81.6	81.6
Ø d8 min. <sup>2)</sup>	18.1	22.2	22.2	28.2	28.2	28.2	36.2	36.2	48.2	48.2
Ø d8 max.	28.2	28.2	28.2	40.2 <sup>4)</sup>	40.2 <sup>4)</sup>	40.2 <sup>4)</sup>	48.2	48.2	60.2	60.2
L4	35	35	60	45	75	75	55	95	65	115
L6 min.	30	30	30	30	30	30	30	30	40	40
M	20	20	20	30	30	30	40	40	47	40
s H11 <sup>2)</sup>	14	17	17	22	22	22	27	27	36	36
s H11 max.	22	22	22	30 <sup>4)</sup>	30 <sup>4)</sup>	30 <sup>4)</sup>	36	36	46	46


Two-flat according to EN ISO 5211

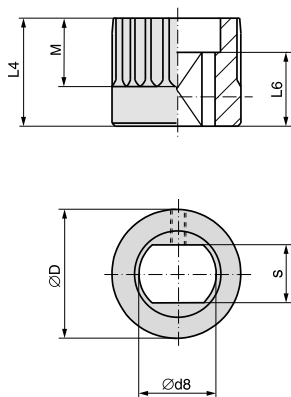

SQ../SQR..	05.2		07.2		10.2		12.2		14.2	
EN ISO 5211	F05	F07	F07	F10	F10	F12	F12	F14	F14	F16
Ø D	41.75	41.75	41.75	51.75	51.75	51.75	67.6	67.6	81.6	81.6
Ø d8 min. <sup>2)</sup>	18.1	22.2	22.2	28.2	28.2	28.2	36.2	36.2	48.2	48.2
Ø d8 max.	28.2	28.2	28.2	36.2	36.2	36.2	48.2 (48 <sup>5)</sup> )	48.2 (48 <sup>5)</sup> )	60.2	60.2
L4	35	35	60	45	75	75	55	95	65	115
L6 min.	25	25	25	25	25	25	30	30	40	40
M	20	20	20	30	30	30	40	40	47	40
s H11 <sup>2)</sup>	14	17	17	22	22	22	27	27	36	36
s H11 max.	22	22	22	27	27	27	36 (41 <sup>5)</sup> )	36 (41 <sup>5)</sup> )	46	46

Mounting position of the coupling within fitting dimensions according to AUMA definition

X max.	3	4	5	8
Y max.	2	5	10	10

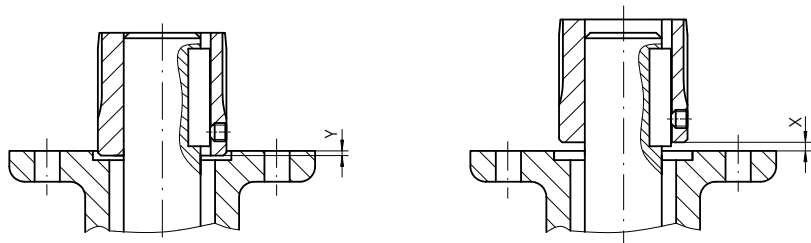

- 1) Dimensions depend on Ø d7, refer to DIN 6885-1
- 2) Recommended size according to EN ISO 5211
- 3) Thread with grub screw
- 4) According to DIN 79
- 5) According to DIN 475

We reserve the right to alter data according to improvements made. Previous documents become invalid with the issue of this document.